



WEEDELETE®

Hoeing machines

WEEDELETE® RS

Mechanical weed control. The intra-row weeder hoes both between and in the rows of the trees. It also takes obstacles and drip hoses into account.



ZRS-series PTO

Patented

| WEEDELETE® RS | Working width hoeing bar | Maximum working width incl. swing rotor of choice | | Machine width (transport position) | Machine width |
|---------------|--------------------------|---|--------|------------------------------------|---------------|
| | | 25 cm | 30 cm | | |
| RS 80-Z2 | 80 cm | 130 cm | 140 cm | 93 cm | ± 340 kg |
| RS 100-Z2 | 104 cm | 154 cm | 164 cm | 116 cm | ± 372 kg |
| RS 130-Z2 | 127 cm | 177 cm | 187 cm | 139 cm | ± 412 kg |
| RS 150-Z2 | 150 cm | 200 cm | 210 cm | 162 cm | ± 445 kg |



Important information of WEEDELETE® RS and ZRS:

- Minimum required power 25 HP.
- Minimum hydraulic output 20 liters.
- Easily adjustable depth control.
- Easily adjustable working width.
- Easily adjustable ground pressure of the rotor hoe.
- Suitable for all soil types.
- Leveling effect of the soil.
- Environmentally friendly.
- Version swing rotor with roller probe (hydraulic).
- The working speed depends on the planting distance in the row.
- The maximum working speed is ± 5 km per hour.
- Subsidies are available in many countries.

WEEDELETE® ZRS


Mechanical weed control. This intra-row weeder is meant to hoe blackstrips in tree nurseries, sparing the grass strips in the paths. The WEEDELETE® ZRS can be optionally coupled to the front or the rear of the tractor.




| WEEDELETE® ZRS | Working width minimum | Werking width maximum | Machine with (transport position) | Machine weight |
|---|-----------------------|-----------------------|-----------------------------------|----------------|
| Hydraulic working width adjustment (100 cm) | 160 cm | 320 cm | 125 cm | ± 355 kg |
| Manual working width adjustment (90 cm) | 135 cm | 285 cm | 100 cm | ± 318 kg |
| Fixed working width version | 135 cm | 195 cm | 100 cm | ± 274 kg |

- The swing rotors can be supplied with rotor hoes of Ø25 cm and Ø30 cm.
- Every WEEDELETE® ZRS version is available mounted both in front of or behind the tractor, with single or double hoe arms.
- Several options available: grass edge cutter, adjustable support wheels, sliding probe and adjustable probe sensitivity.


Hydraulic working width adjustment

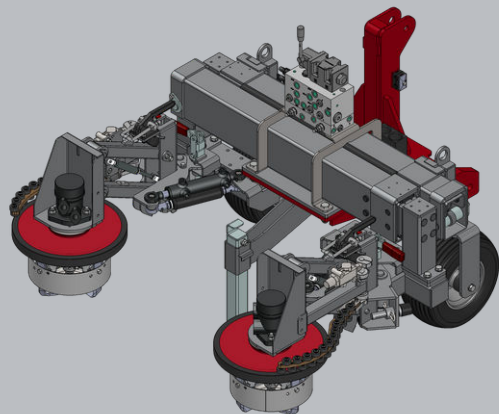

Manual working width adjustment

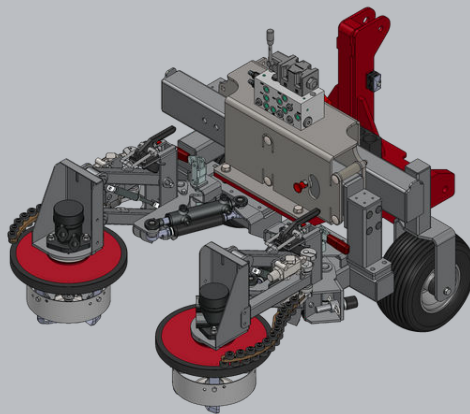

Fixed working width version

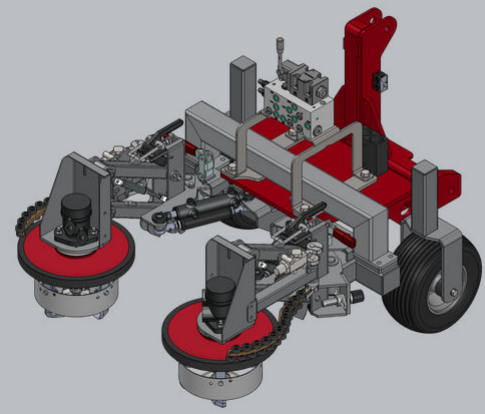

Van Tuijl Innovations B.V.
Tolsestraat 8A
4043 KB Opheusden (NL)

+ 31(0) 488 759009
info@vti.nl
www.vti.nl



VAN TUIJL
INNOVATIONS