WEEDELETE®

Hoeing machines

WEEDELETE® RS

This mechanical hoeing machine hoes both between and in the rows of the trees. It also takes obstacles and drip hoses into account.




WEEDELETE® ZRS

This intra-row weeder is meant to hoe blackstrips in tree nurseries, sparing the grass strips in the paths. The ZRS-series can be optionally coupled to the front or the rear of the tractor.




WEEDELETE® LM

This mower-hoe combination hoes the black strips in tree nurseries and mows the grass lanes in the same pass. The LM series is available with either a fixed or an adjustable working width.

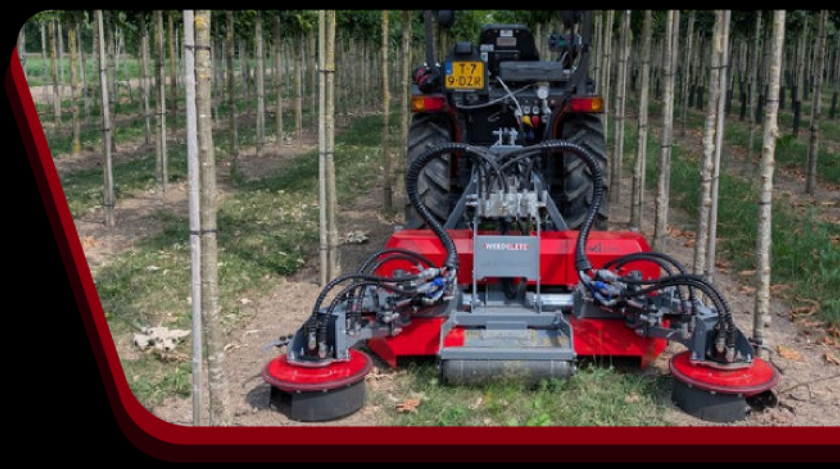


"Innovated from the practice in cooperation with tree growers

WEEDELETE® RS	Working width maximum	Machine width (transport)	Machine weight
RS 80-Z2	140 cm	93 cm	± 340 kg
RS 100-Z2	164 cm	116 cm	± 372 kg
RS 130-Z2	187 cm	139 cm	± 412 kg
RS 150-Z2	210 cm	162 cm	± 445 kg

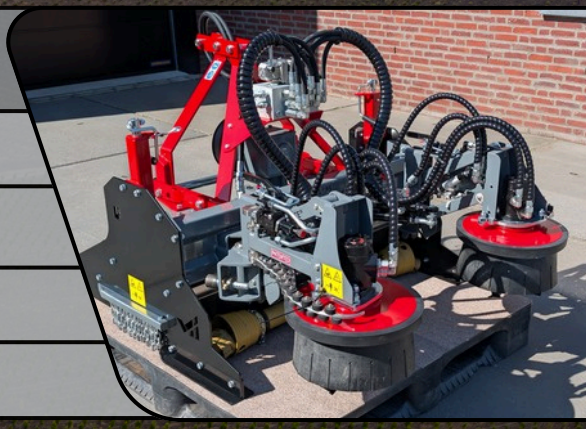

WEEDELETE® ZRS	Working width maximum	Machine width (transport)	Machine weight
Working width adjustment Hydraulic, 100 cm	320 cm	125 cm	± 355 kg
Working width adjustment Manually, 90 cm	285 cm	100 cm	± 318 kg

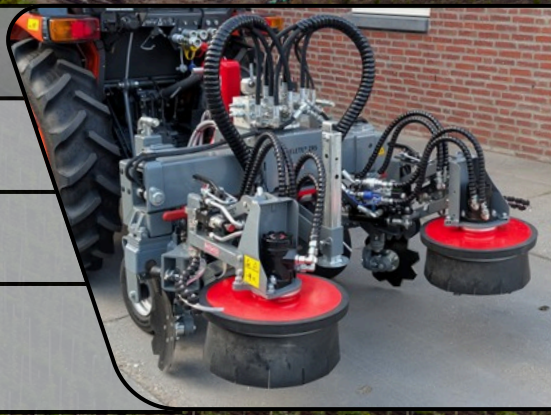

- The hoeing heads are available with rotor hoes of various diameters.
- Automatic working width adjustment and various other options are available.
- Quick-change system for easily interchangeable mowing heads.

WEEDELETE® LM — Mower/hoe combination



LM Fixed: Fixed working width
- Available in various working widths

LM Variable: Hydraulically adjustable working width
- Automatic working width adjustment available

- Compact design and a strong, robust mower.
- Quick-change system for easily interchangeable mowing heads.

"Sold worldwide in more than 20 countries"

Important information

- Minimum hydraulic output 20 liters
- Minimum required power 25 HP
- Suitable for all soil types
- Easliy adjustable
- Grant opportunities
- Levelling effect of the soil
- Maximum working speed of 6 km per hour
- The working speed depends on the planting distance in the row

VAN TUIJL INNOVATIONS

Van Tuijl Innovations B.V.
Tolsestraat 8A
4043 KB Opheusden (NL)

+ 31 (0) 488 759009
info@vti.nl
www.vti.nl

Images, dimensions and weights are approximate and subject to change.